

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33664 A1

(51) International Patent Classification⁷: **H01Q 1/24**

(21) International Application Number: **PCT/SE00/02155**

(22) International Filing Date:
2 November 2000 (02.11.2000)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
9904002-4 3 November 1999 (03.11.1999) **SE**

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).**

(72) Inventors: **OLSSON, Mats; Södra Gulsparvsgatan 27B, S-215 61 Malmö (SE). YING, Zhinong; Skyttelinjen 50, S-226 49 Lund (SE).**


(74) Agents: **STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **AN ANTENNA DEVICE, AND A PORTABLE TELECOMMUNICATION APPARATUS INCLUDING SUCH AN ANTENNA DEVICE**

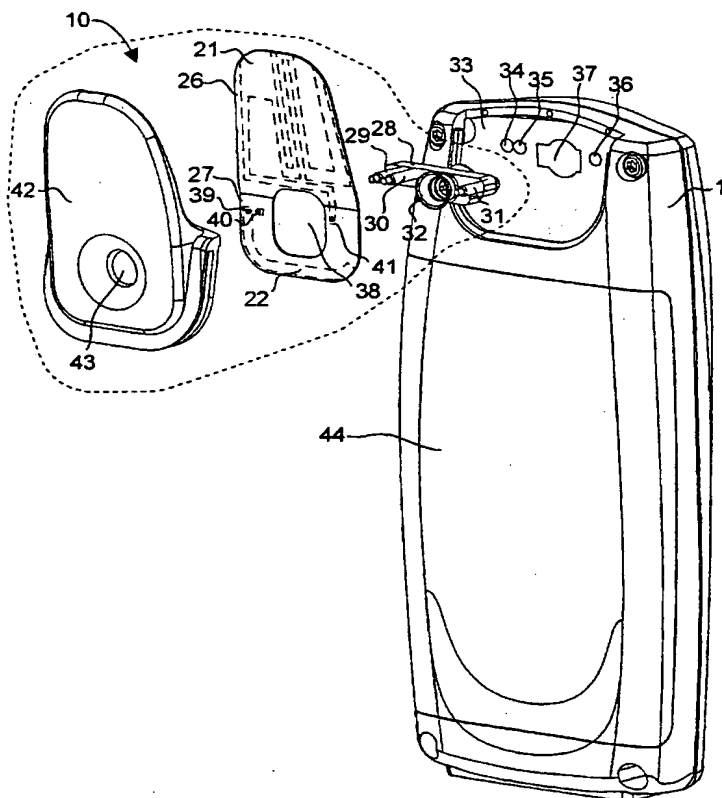

(57) Abstract: An antenna device (10) for a portable telecommunication apparatus (1) has a first antenna (21) adapted for telecommunication in at least a first frequency band and a second antenna (22) adapted for short-range supplementary communication in a second frequency band. The first and second antennas (21, 22) are formed on a common support element (26, 27).

WO 01/33664 A1



Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**AN ANTENNA DEVICE, AND A PORTABLE TELECOMMUNICATION
APPARATUS INCLUDING SUCH AN ANTENNA DEVICE**

5 **Technical Field**

 The present invention relates to the field of radio
communication and, in more particular, to an antenna device
for use in a portable telecommunication apparatus of the
type having a first antenna adapted for telecommunication
10 in at least a first frequency band and a second antenna
adapted for short-range supplementary communication in a
second frequency band.

Prior Art

15 Examples of a portable communication apparatus as
set out above are a mobile telephone, a cordless telephone,
a portable digital assistant, a communicator, a paging
device, an electronic payment device, or a portable navi-
gating device. Among these, the mobile or cellular tele-
20 phone is currently believed to be the most prominent in
terms of market penetration and sales volumes. Therefore,
for the rest of this document, reference will be made to
a mobile or cellular telephone for any commercially avail-
able mobile communications network, such as GSM, UMTS or
25 D-AMPS. However, the invention is not limited to merely a
mobile telephone. On the contrary, the invention is best
defined by the appended independent patent claims.

 Traditionally, older mobile telephones were only
capable of normal speech communication between two users
30 through a mobile communications network and, in many situa-
tions, a public switched telephone network. Historically,
mobile telephones have often been provided with a monopole
antenna mounted externally to the apparatus housing of the
telephone. Rod antennas, whip antennas and helix antennas
35 are some examples of such external monopole antennas.

More recently, some mobile telephones have been provided with built-in antennas in the form of a printed pattern of conductive material. Microstrip patch antennas, meandering monopole antennas and planar inverted F-type antennas (PIFA) are examples of such antennas.

Even more recently, short-range supplementary communication services have been introduced for mobile telephones. One example of such a short-range supplementary communication service is commonly referred to as Bluetooth® and operates within an unlicensed frequency band at 2.4 GHz, which is often referred to as ISM ("Instrumental, Scientific and Medical") and is globally available. Bluetooth® is intended to provide flexible communication of data and speech between portable devices, such as mobile telephones, laptop computers, personal digital assistants (PDA), and various peripherals for these devices, such as printers, wireless headset accessories, etc.

Conventionally, the antenna for short-range supplementary communication (hereinafter referred to as "Bluetooth® antenna") is implemented as a separate unit, which is located on the secondary side of the main printed circuit board inside the mobile telephone, well separated from the cellular antenna. However, as mobile telephones get smaller and smaller in size, the available printed circuit board area also decreases. Cellular radio circuitry must be prioritized in the layout of the printed circuit board, and as a result, in existing telephones, the Bluetooth® antenna has been placed in areas on the keyboard side of the printed circuit board, where the performance in talking position is not good.

Moreover, if the Bluetooth® antenna is positioned too close to the cellular antenna on the printed circuit board, separate filtering components must be provided in order to isolate the cellular antenna from the Bluetooth® antenna so as to avoid interference.

Summary of the Invention

The present invention seeks to remedy the problems set out above. In particular, it is an object of the invention to provide an antenna device for a miniaturized mobile telephone, which allows excellent performance both for a multi-band cellular antenna and a short-range supplementary communication antenna (e.g. Bluetooth®). Additionally, the desired solution is one where interference between the two antennas is avoided without a major cost penalty, and which allows low costs for development and production of antenna components.

The above objects have been achieved by an antenna device, where the cellular antenna is combined with the Bluetooth® antenna by placing the two antennas together on a common support element, such as a flexible diélectric film. Preferably, the two antennas are implemented as traces of printed conductive material. The different traces, i.e. the cellular antenna trace and the Bluetooth® antenna trace, have separated feeding and grounding points. The support element is preferably mounted in a plastic or rubber antenna housing, which is assembled in the rear cover of the telephone. The two antenna traces are preferably connected to the printed circuit board (and the cellular and Bluetooth® radio circuitry thereon) by an antenna connector having resilient contact pins for each feeding/grounding point.

In a preferred embodiment of the invention the cellular antenna trace is a triple-band printed monopole type antenna having only a single feeding point. The Bluetooth® antenna is a PIFA-type antenna having a feeding point and a grounding point.

By placing the Bluetooth® antenna in the top area of the back cover of the mobile telephone, the antenna performance gets better. Low component and development costs

are available thanks to the invention. The proposed antenna device has a small size and can be encapsulated in a thin flexible rubber or plastic housing, allowing high flexibility for the designer of the mobile telephone.

5 These and other objects, features and advantages of the present invention will appear clearly from the following detailed disclosure of a preferred embodiment, from the enclosed drawings as well as from the appended claims.

10 It should be emphasized that the term "comprises/ comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15

Brief Description of the Drawings

20 A presently preferred embodiment of the present invention will be described in the following detailed disclosure, reference being made to the accompanying drawings, in which

FIG 1 is a schematic front view of a portable telecommunication apparatus with an antenna device according to the preferred embodiment, as well as an example of an environment in which it may operate,

25 FIG 2 is a schematic block diagram of the main components of the portable telecommunication apparatus shown in FIG 1,

30 FIG 3 is a detailed perspective rear view of the portable telecommunication apparatus in FIGs 1 and 2, illustrating primarily the antenna device,

FIG 4 is a perspective rear view corresponding to the one in FIG 3, but where the antenna device is shown integrated with the portable telecommunication apparatus,

35 FIGs 5a-c show a front view, side view and perspective view, respectively, of the first and second antennas

(the cellular antenna and the short-range supplementary communication antenna) of the antenna device, provided on a common support element,

FIGs 6a-c show a front, side and perspective view, respectively, of an antenna connector for connecting the antenna device to the portable telecommunication apparatus, and

FIGs 7a-c show a front, side and perspective view, respectively, of the antenna device shown in FIGs 5a-c when connected to a printed circuit board in the portable telecommunication apparatus through the antenna connector shown in FIGs 6a-c.

Detailed Disclosure

FIGs 1-3 illustrate a mobile telephone 1 as a schematic front view, a block diagram and a detailed perspective rear view, respectively. As seen in the drawings, the mobile telephone 1 has an antenna device 10, which is mounted to an upper rear portion of the mobile telephone 1, immediately above a battery 44. The antenna device 10 has a cellular antenna 21, which is electrically connected to a cellular radio transceiver 23 on a printed circuit board 33 (FIG 3) through an antenna connector 28, as will be described in more detail later.

Thus, the mobile telephone 1 may establish a wireless link 16 to a radio station (base station) 17 in a mobile telecommunications network 18, such as GSM, UMTS or D-AMPS.

The antenna device 10 moreover comprises a short-range supplementary communication antenna 22, which is referred to as the "Bluetooth® antenna" in the rest of this section. The Bluetooth® antenna 22 is electrically connected to Bluetooth® radio circuitry on the printed circuit board 33 through the antenna connector 28. In a manner generally known per se the mobile telephone 1 may establish another wireless link 19 to a peripheral device 20 through

the Bluetooth® antenna 22. The peripheral device 20 is illustrated as a printer in FIG 1 but may equally well be another mobile telephone, a laptop computer, a stationary computer, a personal digital assistant (PDA), a modem, a telefax machine, a wireless headset accessory, a home appliance, etc.

As seen in FIG 1, the mobile telephone 1 comprises a number of conventional components, such as a loudspeaker 11, a display 12, a set of cursor keys 13, an alphanumeric keypad 14 and a microphone 15. These components are not believed to require any detailed description herein.

Before turning to the remaining figures, which will illustrate the antenna device 10 in more detail, reference is made to FIG 2, which illustrates the above on a general level. As seen in FIG 2, the mobile telephone 1 comprises a main controller 25, which preferably is mounted on the printed circuit board 33. The main controller 25 may be implemented by any commercially available microprocessor or another type of programmable logic circuitry. The main controller 25 is operatively connected to the cellular radio 23 and the Bluetooth® radio 24.

Referring now to FIGs 3-7c, the antenna device 10 will be described in detail. The antenna device 10 comprises a support element 26, 27, upon which both the cellular antenna 21 and the Bluetooth® antenna 22 are mounted. In the preferred embodiment, the common support element 26, 27 is a flexible dielectric film. Suitable film materials are commercially available from Rogers Corporation, Circuit Materials Division, 100 N, Dobson Road, Chandler, AZ-85224, USA, or alternatively from Freudenberg, Mectec GmbH & KG, Headquarters, D-69465 Weinheim/Bergstrasse, Germany. Such flexible dielectric films are utterly thin; the typical thickness ranges from about 70 µm to about 400 µm.

As shown in FIG 3, the flexible dielectric film has a first portion 26, on which the cellular antenna trace 21

is printed. The flexible dielectric film also has a second portion 27, on which the Bluetooth® antenna trace 22 is printed. As shown in FIG 5b, the two portions 26 and 27 may be arranged at a certain angle to each other. It is to be observed that the antenna traces 21 and 22 are provided on the "rear surface" of the flexible dielectric film 26, 27 as viewed in FIG 3, i.e. the surface that faces the rear side of the mobile telephone 1. Therefore, the antenna traces 21 and 22 are only indicated by dashed lines in FIG 3. The shapes of the cellular antenna trace 21 and the Bluetooth® trace 22 appear more clearly from FIG 5a, FIG 5c, FIG 7a and FIG 7c.

Referring back to FIG 3, the flexible dielectric film 26, 27 is provided in an antenna housing 42 preferably made of plastic or rubber. The antenna housing 42 has a form that fits a corresponding recess in the upper rear portion of the cover of the mobile telephone 1, immediately above the battery 44.

The cellular antenna 21 is tuned to the or each frequency band that it is intended to operate in. In the preferred embodiment the cellular antenna 21 is tuned for operation in the 900 MHz GSM band and also at least one of the 1800 MHz DCS band and the 1900 MHz PCS band, preferably both of these. However, other antenna band constellations, both their number and their respective nominal frequency, are applicable to the invention. Additionally, the layout of the cellular antenna 21 may be different than the one illustrated. The exact layout of the cellular antenna 21 is to be determined by a skilled person as a matter of routine design work, due care being taken to the intended application.

The cellular antenna trace 21 forms a monopole-type antenna and has a single feeding point 41 but is not electrically grounded. The Bluetooth® antenna 22, on the other hand, has a feeding point 39 as well as a grounding point

40, which is positioned in proximity with the feeding point 39. The Bluetooth® antenna 22 is a planar inverted F-type antenna (PIFA) adapted to operate within the 2.4 GHz ISM band according to the preferred embodiment. The feeding point 41 of the cellular antenna trace 21 is electrically isolated from the feeding point 39 and grounding point 40 of the Bluetooth® antenna trace 22.

The cellular antenna trace 21 and the Bluetooth® antenna trace 22 are connected to the respective radio circuitry on the printed circuit board 33 through the antenna connector 28. More specifically, as appears particularly from FIGs 6a-c, the antenna connector 28 has a first contact pin 31, which provides electrical contact between the feeding point 41 of the cellular antenna trace 21 and a first contact point 36 on the printed circuit board 33. In turn, the cellular radio 23 is electrically connected to the contact point 36. Moreover, the antenna connector 28 has a second contact pin 29 for connecting the feeding point 39 of the Bluetooth® trace 22 and a second contact point 34 on the printed circuit board 33, said second contact point 34 being electrically connected to the Bluetooth® radio 24. Additionally, the antenna connector 28 has a third contact pin 30, the purpose of which is to connect the grounding point 40 of the Bluetooth® antenna trace 22 with a grounding point 35 on the printed circuit board 33.

In the preferred embodiment, the contact pins 29, 30 and 31 of the antenna connector 28 are implemented as resilient pogo pins. Alternatively, the contact pins may advantageously be implemented as spring ledges, or as another type of contact members, including fixed (non-resilient) means.

The antenna connector 28 also has an external antenna connector 32 for allowing an external antenna, such as a vehicle-mounted handsfree antenna, to be coupled to an

external antenna input 37 on the printed circuit board 33 through an opening in the flexible dielectric film 26, 27 and a corresponding opening 43 in the antenna housing 42.

As seen in FIGs 7a and 7c, the printed circuit
5 board 33 has fastening openings 45 and 46 for allowing safe mounting of the printed circuit board 33 within the cover of the mobile telephone 1.

The present invention has been described above with reference to a preferred embodiment. However, other em-
10 bodiments than the one referred to above are equally possible within the scope of invention, which is best defined by the appended independent claims.

CLAIMS

1. An antenna device (10) having a first antenna (21) adapted for telecommunication in at least a first frequency band and a second antenna (22) adapted for short-range supplementary communication in a second frequency band, characterized in that

the first and second antennas (21, 22) are formed on a common support element (26, 27).

10

2. An antenna device as in claim 1, where the first and second antennas (21, 22) are formed as printed traces of conductive material on said support element (26, 27).

15

3. An antenna device as in claim 1 or 2, where said support element comprises a flexible dielectric film.

4. An antenna device as in claim 2 or 3, where the first antenna (21) comprises a first feeding point (41) and the second antenna (22) comprises a second feeding point (39), the first and second feeding points being electrically isolated from each other.

5. An antenna device as in claim 4, where the second antenna (22) comprises a grounding point (40) positioned in proximity with the second feeding point (39).

6. An antenna device as in claim 5, where the second antenna (22) is a planar inverted F-type antenna (PIFA).

30

7. An antenna device as in any of claims claim 4-6, where the first antenna (21) is a monopole antenna.

8. An antenna device as in claim 6, where the second antenna (22) is adapted for Bluetooth® communication in a 2.4 GHz frequency band.

35

9. An antenna device as in claim 7, where the first antenna (21) is a multi-band antenna.

5 10. An antenna device as in claim 9, where the first antenna (21) is adapted for communication in a 900 MHz frequency band and at least one of an 1800 MHz frequency band and a 1900 MHz frequency band.

10 11. A portable telecommunication apparatus (1), **characterized by** an antenna device as defined in any of claims 1-10.

15 12. A portable telecommunication apparatus as in claim 11, further comprising a printed circuit board (33) with radio circuitry (23, 24) mounted thereon, and an antenna connector (28) adapted to provide electric contact between the first and second antennas (21, 22) and said radio circuitry (23, 24).

20

13. A portable telecommunication apparatus as in claim 12, the antenna device being defined by claim 5, wherein the antenna connector (28) has:

25 a first resilient contact pin (31) adapted to engage with the first feeding point (41) of the first antenna (21),

 a second resilient contact pin (29) adapted to engage with the second feeding point (39) of the second antenna (22), and

30 a third resilient contact pin (30) adapted to engage with the grounding point (40) of the second antenna (22).

14. A portable telecommunication apparatus as in claim 13, wherein the first, second and third resilient
35 contact pins (31, 29, 30) are pogo pins.

15. A portable telecommunication apparatus as in claim 13, wherein the first, second and third resilient contact pins (31, 29, 30) are spring ledges.

5



16. A portable telecommunication apparatus as in any of claims 11-15, where the antenna device (10) is contained in a plastic or rubber antenna housing (42), which is attached to an upper rear portion of the portable telecommunication apparatus.

10

17. A portable telecommunication apparatus as in any of claims 11-16, where the apparatus is a radio telephone (1), preferably a mobile telephone.

15

18. A portable telecommunication apparatus as in claim 17, where the apparatus is adapted for use in a GSM, UMTS or D-AMPS mobile telecommunications network.

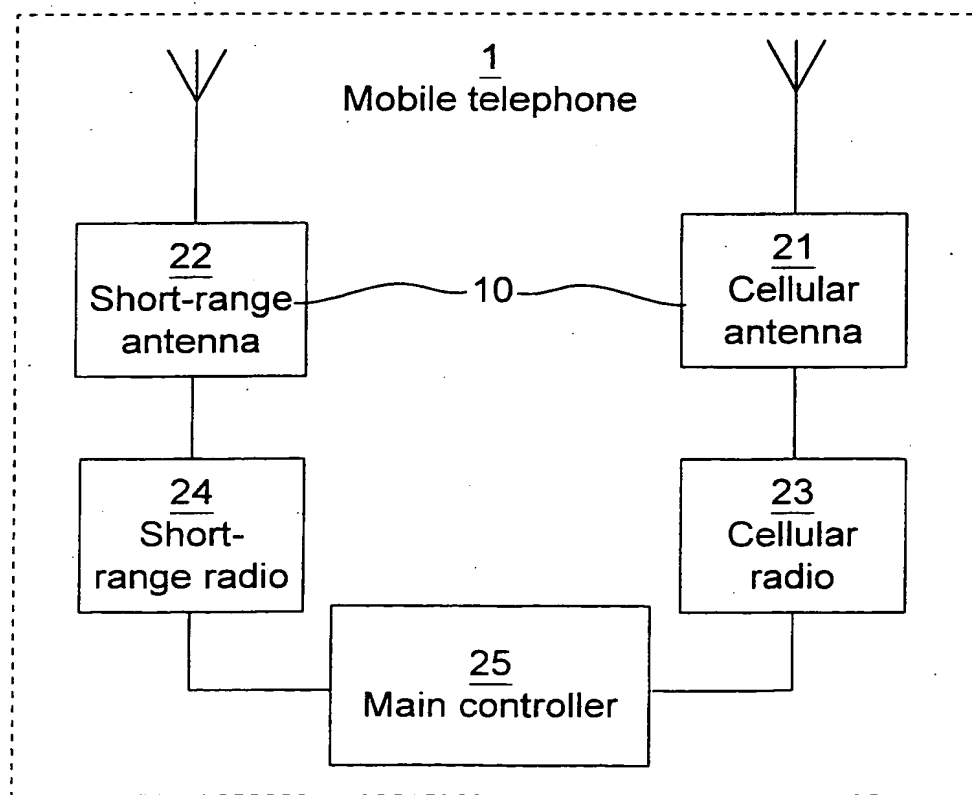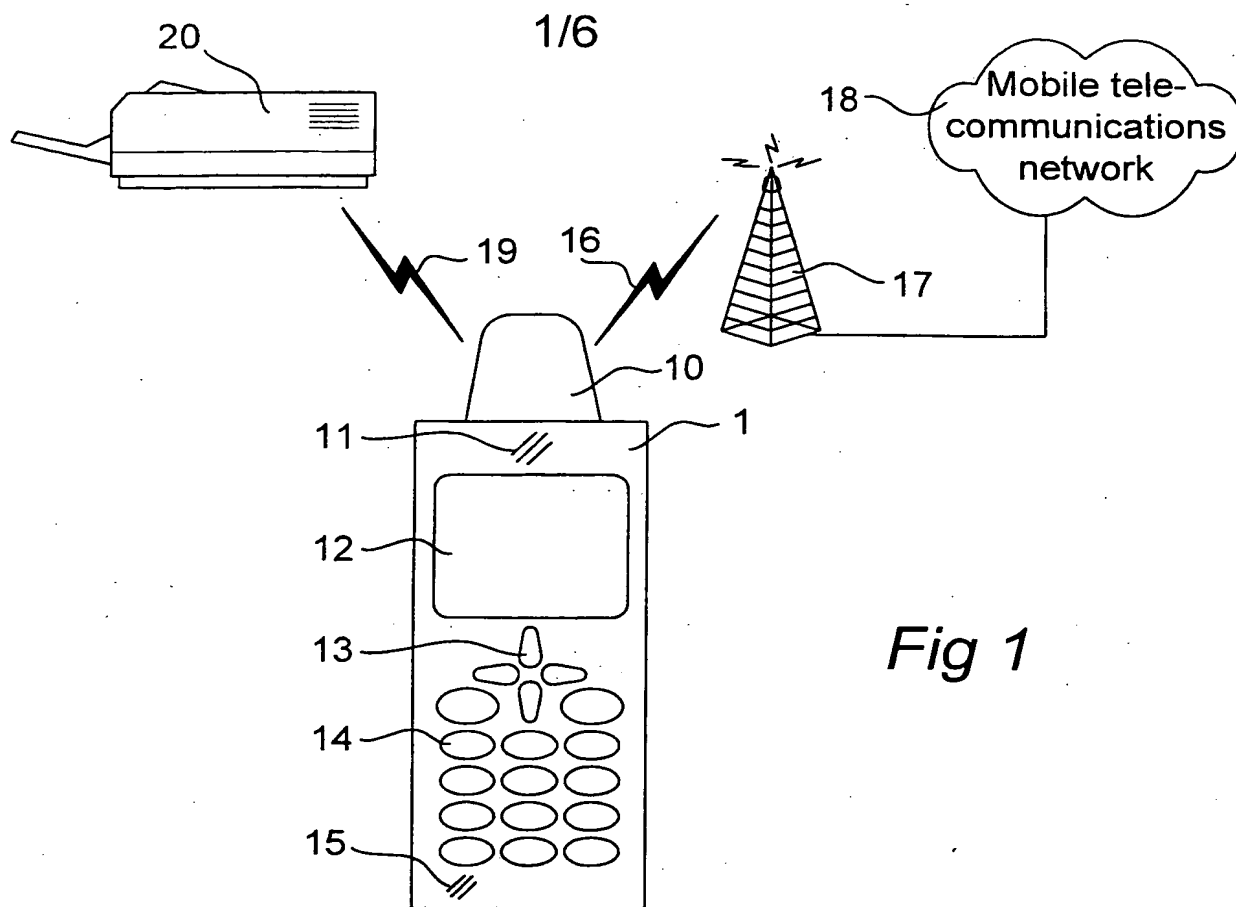

2/6

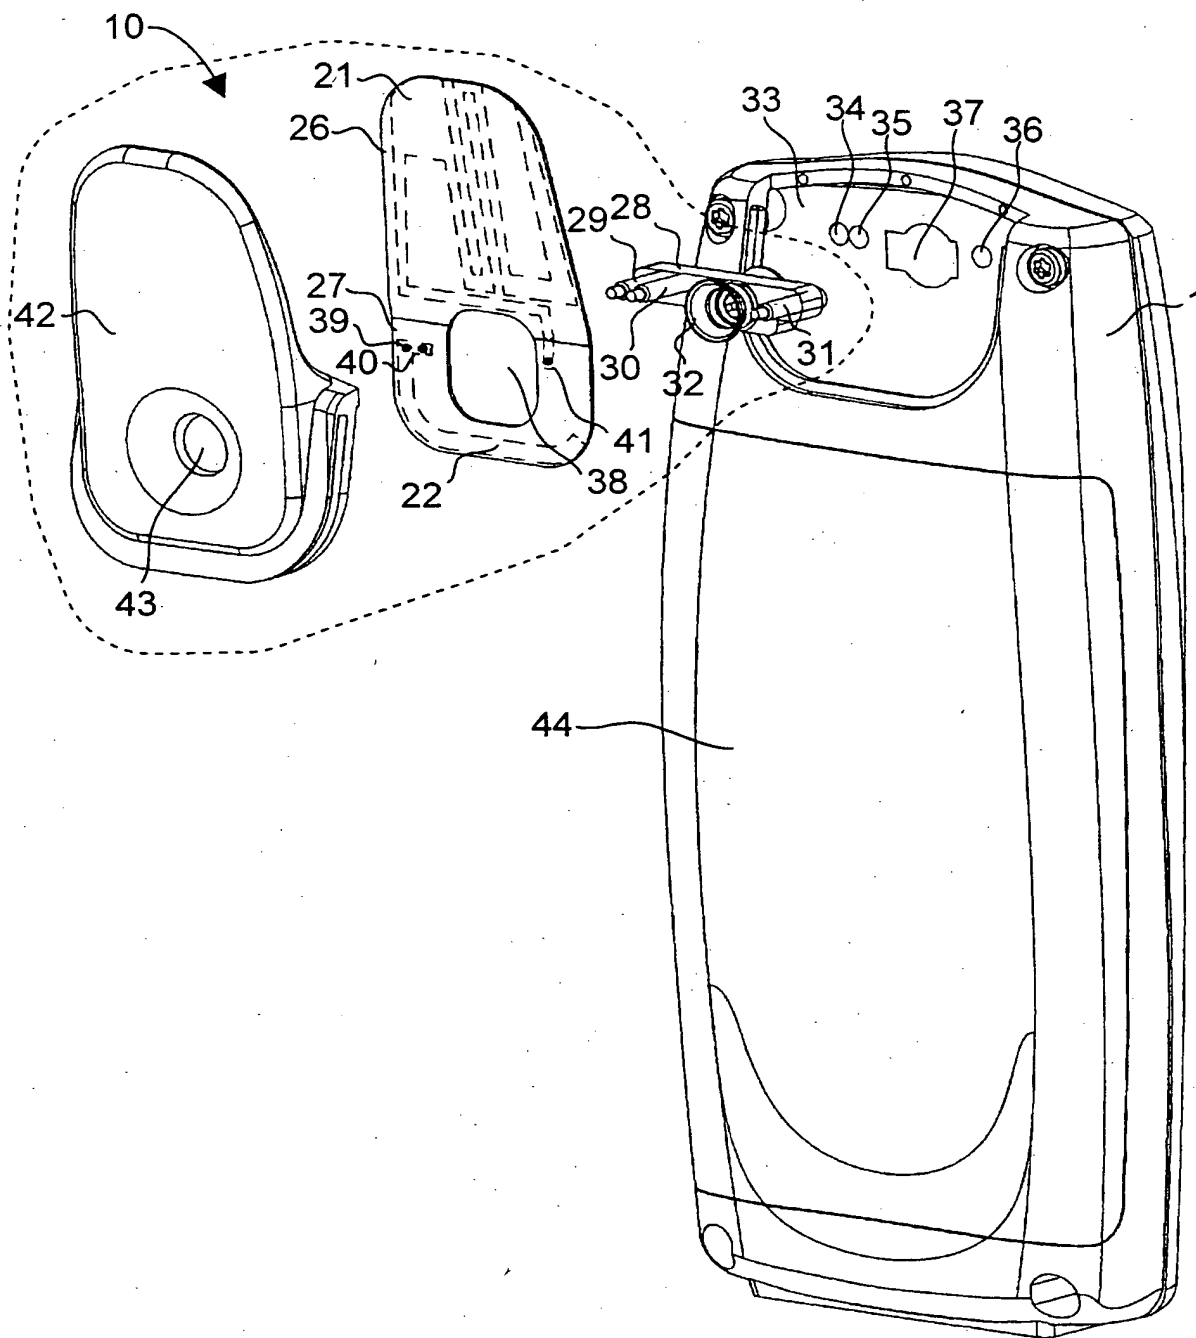
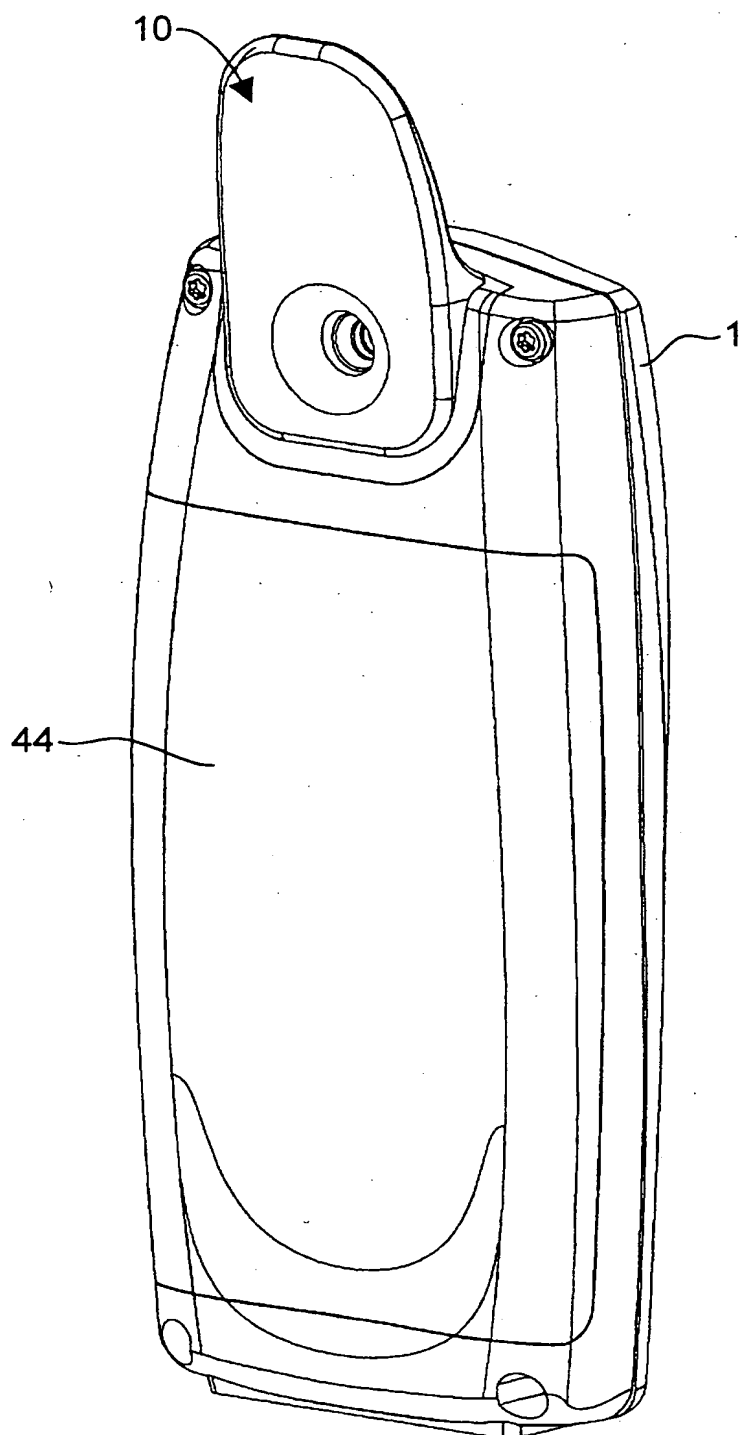


Fig 3

3/6

*Fig 4*

4/6

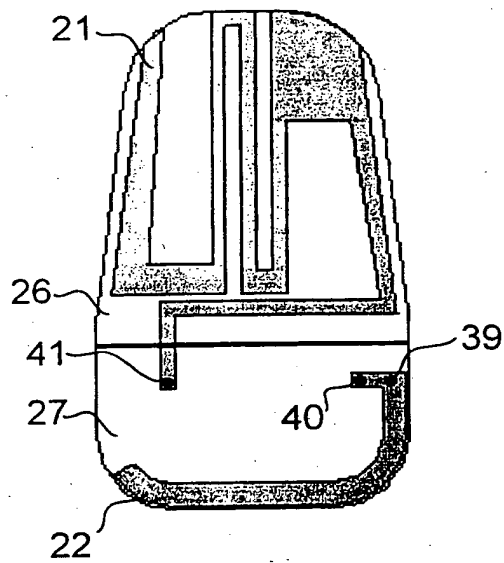


Fig 5a

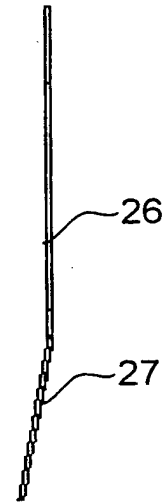


Fig 5b

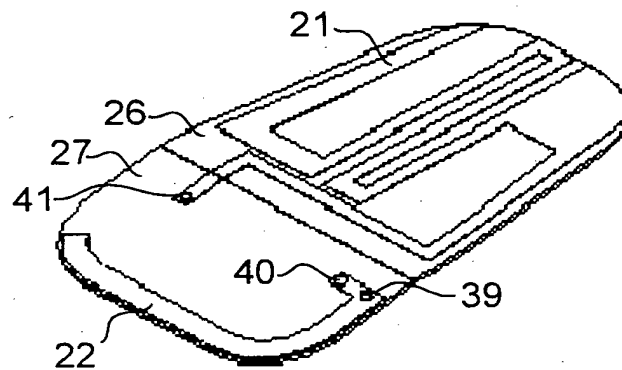
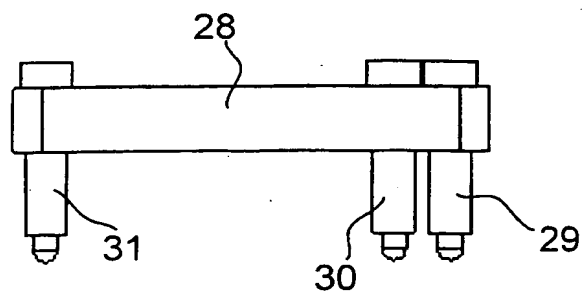

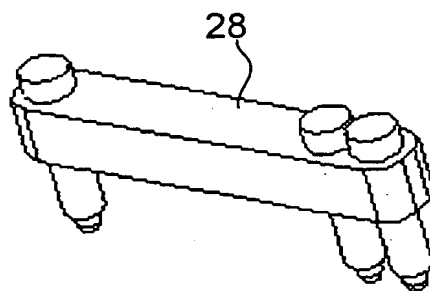


Fig 5c

5/6

*Fig 6a**Fig 6b**Fig 6c*

6/6

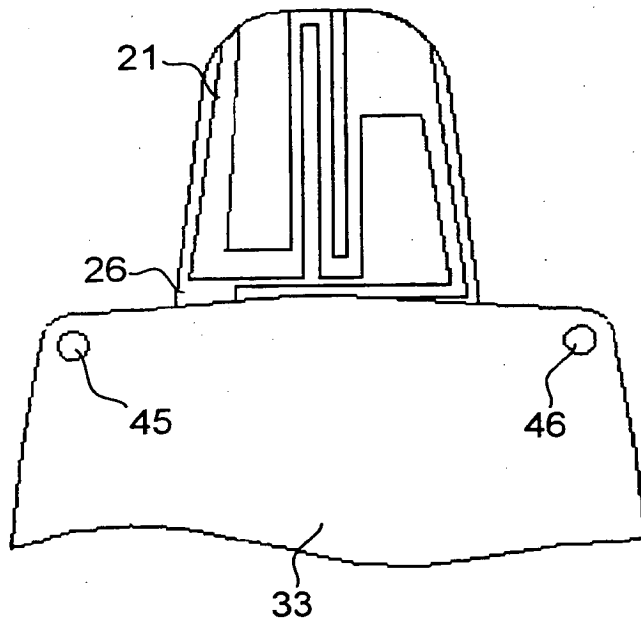


Fig 7a

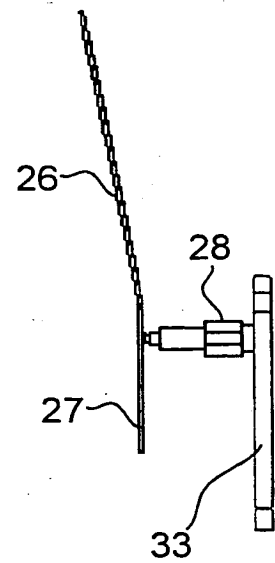


Fig 7b

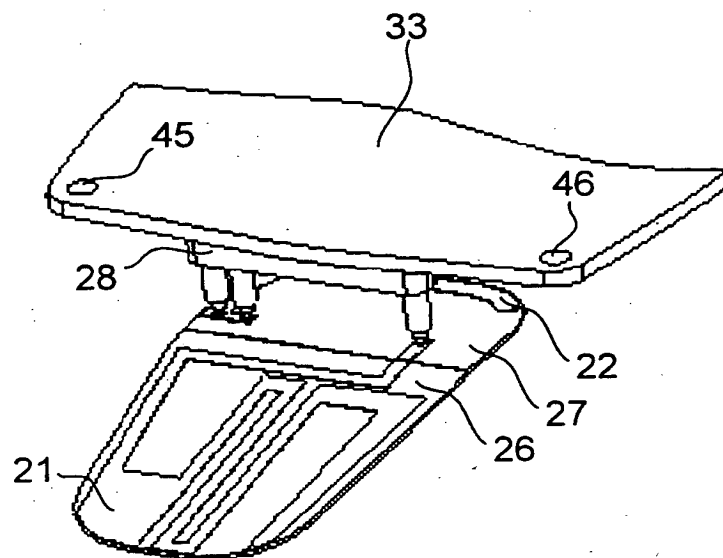


Fig 7c

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/02155

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01Q 1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9917444 A1 (ROCKWELL SEMICONDUCTOR SYSTEMS, INC.), 8 April 1999 (08.04.99) --	1-18
A	WO 9948315 A1 (NOKIA MOBILE PHONES LIMITED), 23 Sept 1999 (23.09.99) --	1-18
A	US 5898408 AQ (DU), 27 April 1999 (27.04.99) --	1-18
A	US 5861850 A (ROBERTSON, JR. ET AL), 19 January 1999 (19.01.99) -- -----	1-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 February 2001

Date of mailing of the international search report

23 -02- 2001

Name and mailing address of the ISA/

S.P.T.O.

Facsimile No.

Authorized officer

S-E Bergdahl / JA A
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

27/12/00

International application No.

PCT/SE 00/02155

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
WO	9917444	A1	08/04/99	NONE	
WO	9948315	A1	23/09/99	AU 2849299 A	11/10/99
				AU 2950299 A	11/10/99
				FI 980623 A	20/09/99
				FI 981995 A	19/09/99
				WO 9948312 A	23/09/99
				AU 2839199 A	11/10/99
				GB 2336069 A	06/10/99
				GB 9805736 D	00/00/00
				GB 9805843 D	00/00/00
				WO 9948311 A	23/09/99
US	5898408	AQ	27/04/99	NONE	
US	5861850	A	19/01/99	NONE	